

GROUNDING - MECÁNICOS

PRENSAS PARALELAS TIPO UC

FIGURA 1

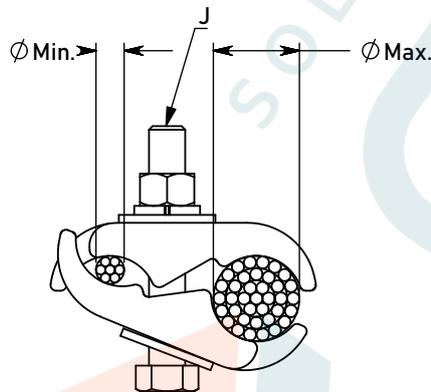
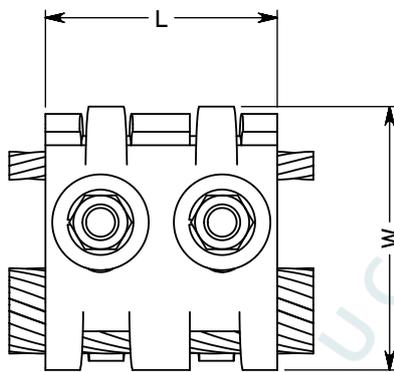
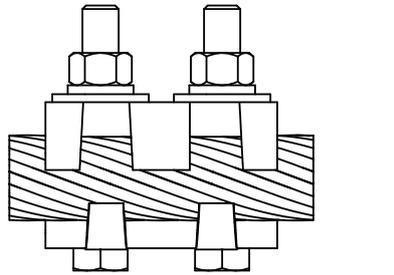


FIGURA 2

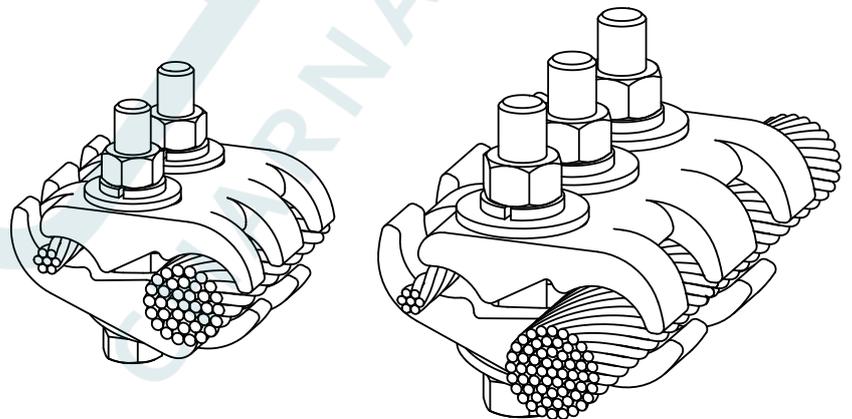
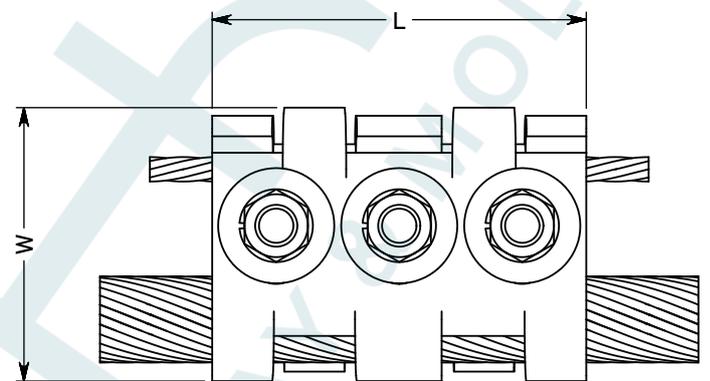
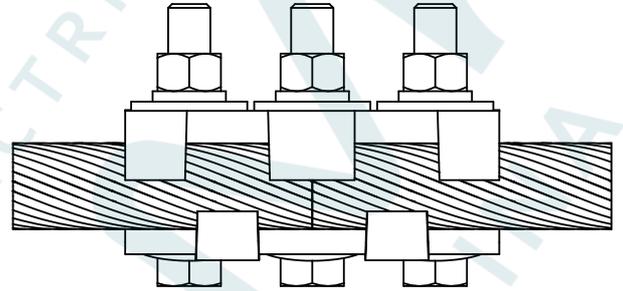


TABLA DE PRODUCTOS

Nro. Catálogo	Fig.	Conductores Admitidos						Dimensiones generales		Herrajes (Pulg.)
		Conductor Mínimo			Conductor Máximo			L	W	J
		Ø Ext.	Sección mm ²	AWG/MCM	Ø Ext.	Sección mm ²	AWG/MCM			
PBUC4W32	1	5,9	21,1	4 AWG	18,5	203	400 MCM	50	57	5/16"
PBUC2W35	1	7,4	33,5	2 AWG	22,7	304	600 MCM	60	67	3/8 "
PBUC2W40	2	7,4	33,5	2 AWG	26,2	405	800 MCM	110	80	1/2 "
PBUC3045	2	16	152	300 MCM	33	644	1250 MCM	110	93	1/2 "

SI NO SE INDICA LO CONTRARIO, LAS COTAS SE EXPRESAN EN MILÍMETROS

MATERIALES PARA HERRAJES

- ACERO INOX. AISI 304
- ACERO GALVANIZADO
- ACERO ZINCADO

TOLERANCIAS DIMENSIONALES

DIMENSIONALES		ANGULARES	
EN 50 MM	+/- 2 MM	EN 50 MM	+/- 0.5°

PARA CONEXIONES BI-METÁLICAS SE ENTREGAN LOS PRODUCTOS CON UN BAÑO DE ESTAÑO EN CALIENTE